


Zwillingautogenschlauch 255

Multi-layer rubber hose with Polyester fabric, vulcanized as a twin line

Applications	welding technology, construction machines
Structure	EPDM, blue / blue/red, opaque, cross braid
Temperature	-20°C up to 90°C
Properties	good low-temperature flexibility, high pressure resistance, good chemical resistance, good oil & petrol resistance

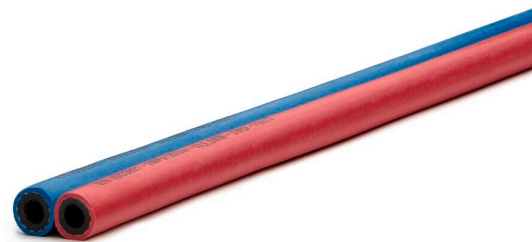

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Burst Pressure (bar)	Weight (kg/m)	Total Weight per Piece (kg)	Length (m)	Article Number
6	13,00	3,50	30	20,00	60,00	0,32000	12,80	40	255006640
9	13,16	3,50	45	20,00	60,00	0,45000	22,50	50	255006950