


APDatec 142

Very flexible hose made of soft PVC, reinforced with an shock resistant rigid PVC spiral

- Applications** liquid manure spreading, waste water, agricultural technology, sewage treatment plants, agriculture
- Structure** PVC / soft PVC, blue, opaque, plastic spiral / rigid PVC
- Temperature** -25°C up to 60°C
- Properties** very good flexibility, crush-resistant, very high vacuum resistance, high pressure resistance, with external abrasion protection spiral, very smooth inside, corrugated outside

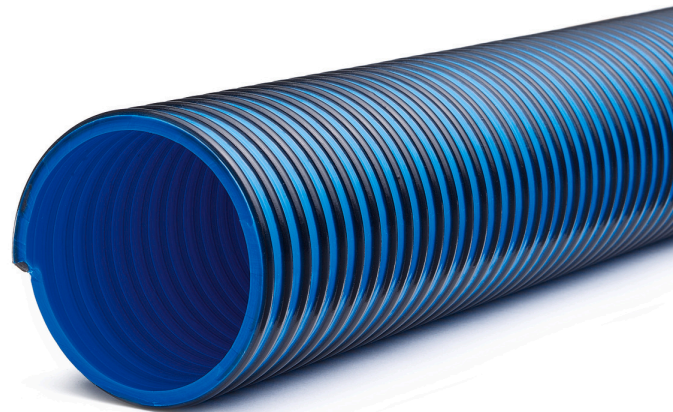

| Inner Diameter (mm) | Outer Diameter (mm) | Wall Thickness (mm) | Bending Radius (mm) | Max. Operating Pressure (bar) | Vacuum Max. (bar) | Weight (kg/m) | Total Weight per Piece (kg) | Length (m) | Article Number |
|---------------------|---------------------|---------------------|---------------------|-------------------------------|-------------------|---------------|-----------------------------|------------|----------------|
| 51 | 61,40 | 5,20 | 160 | 5,00 | 0,88 | 1,04000 | 52,00 | 50 | 1420510500 |
| 76 | 87,60 | 5,80 | 250 | 4,00 | 0,88 | 1,70000 | 85,00 | 50 | 1420760500 |
| 80 | 91,60 | 5,80 | 260 | 4,00 | 0,88 | 1,80000 | 90,00 | 50 | 1420800500 |
| 90 | 91,60 | 6,80 | 260 | 4,00 | 0,88 | 2,20000 | 110,00 | 50 | 1420900500 |
| 102 | 116,40 | 7,20 | 320 | 3,00 | 0,88 | 2,75000 | 137,50 | 50 | 1421020500 |
| 110 | 125,00 | 7,50 | 350 | 3,00 | 0,88 | 3,00000 | 75,00 | 25 | 1421100250 |
| 110 | 125,00 | 7,50 | 350 | 3,00 | 0,88 | 3,00000 | 150,00 | 50 | 1421100500 |
| 125 | 140,60 | 7,80 | 400 | 3,00 | 0,88 | 3,60000 | 108,00 | 30 | 1421250300 |
| 152 | 170,00 | 9,50 | 500 | 3,00 | 0,88 | 9,90000 | 9,90 | 2 | 1421520020 |
| 152 | 170,00 | 9,50 | 500 | 3,00 | 0,88 | 14,85000 | 14,85 | 3 | 1421520030 |
| 152 | 170,00 | 9,50 | 500 | 3,00 | 0,88 | 5,26000 | 123,75 | 25 | 1421520250 |
| 160 | 179,00 | 9,50 | 640 | 2,00 | 0,90 | 5,60000 | 5,60 | 20 | 1421600200 |
| 203 | 224,00 | 10,50 | 1.015 | 2,00 | 0,88 | 9,35000 | 182,50 | 25 | 1422030250 |